


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T4S R8W


SEC 10 | SEC 11
SEC 15 | SEC 14

U.S.B.&M.

R-17



LINE	BEARING	DISTANCE
L1	N 30°54'15" W	11.40'
L2	S 32°26'17" E	19.36'
L3	S 02°10'28" E	40.09'
L4	N 00°21'41" E	156.37'

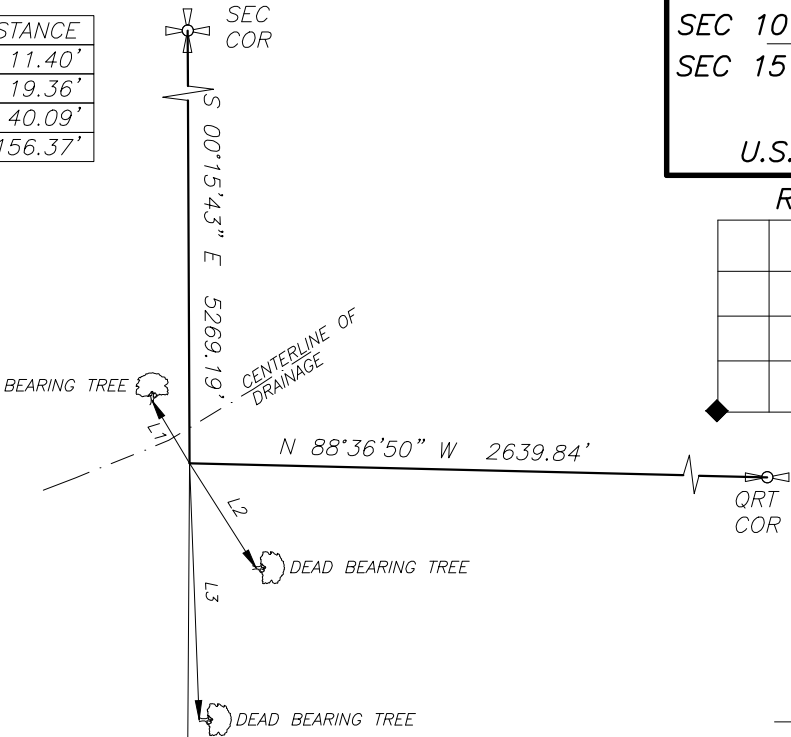

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH
DERIVED FROM G.P.S. OBSERVATIONS AT A
CONTROL POINT (SECTION CORNER) LOCATED
AT LAT. 40°09'16.01932"N AND LONG.
110°45'51.61780"W USING THE UTAH STATE
G.P.S. VIRTUAL REFERENCE STATION CONTROL
NETWORK MAINTAINED AND OPERATED BY THE
AUTOMATED GEOGRAPHIC REFERENCE CENTER



SCALE: 1"=30'



DESCRIPTION OF CORNER
EVIDENCE FOUND

FOUND ORIGINAL MARKED STONE AND
BEARING TREES

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET A DUCHESNE COUNTY 2½" DIA. ALUM
CAP ON 5/8"X24" REBAR AT POSITION OF
CORNER WITH STONE RESET UPSIDE DOWN
ALONGSIDE OF MONUMENT AND REFERENCED
CORNER AS SHOWN

"T" POST

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7220562.100
E: 1846104.219
NAVD88 EL: 6999.89 FEET

LATITUDE: 40°08'23.96542"N

LONGITUDE: 110°45'51.30779"W

ELLIPSOID HEIGHT: 6946.47 FEET
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300040S0080W0_500500

CERTIFICATION

I Jerry D. Allred , Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 23 APR '18

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

